

品名

VP-1501

REV




REVISIONS REC.

DATE

①

Pin座厚度加胶0.3,以改善Pin拉力

08.07.22

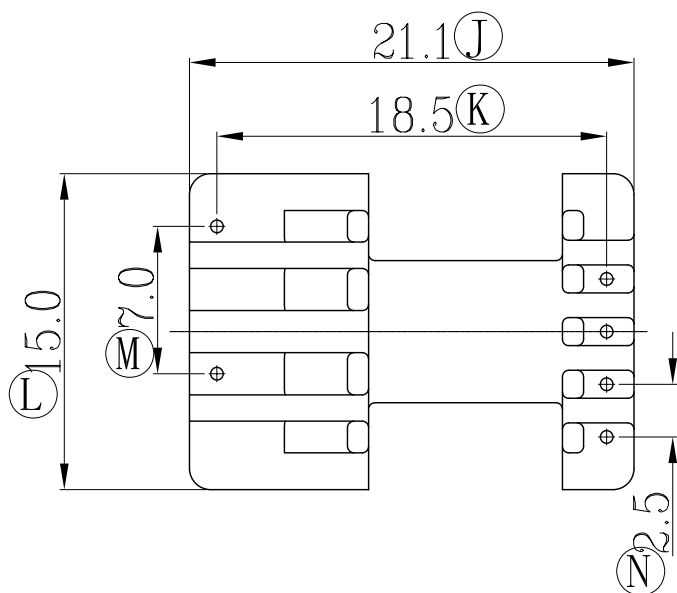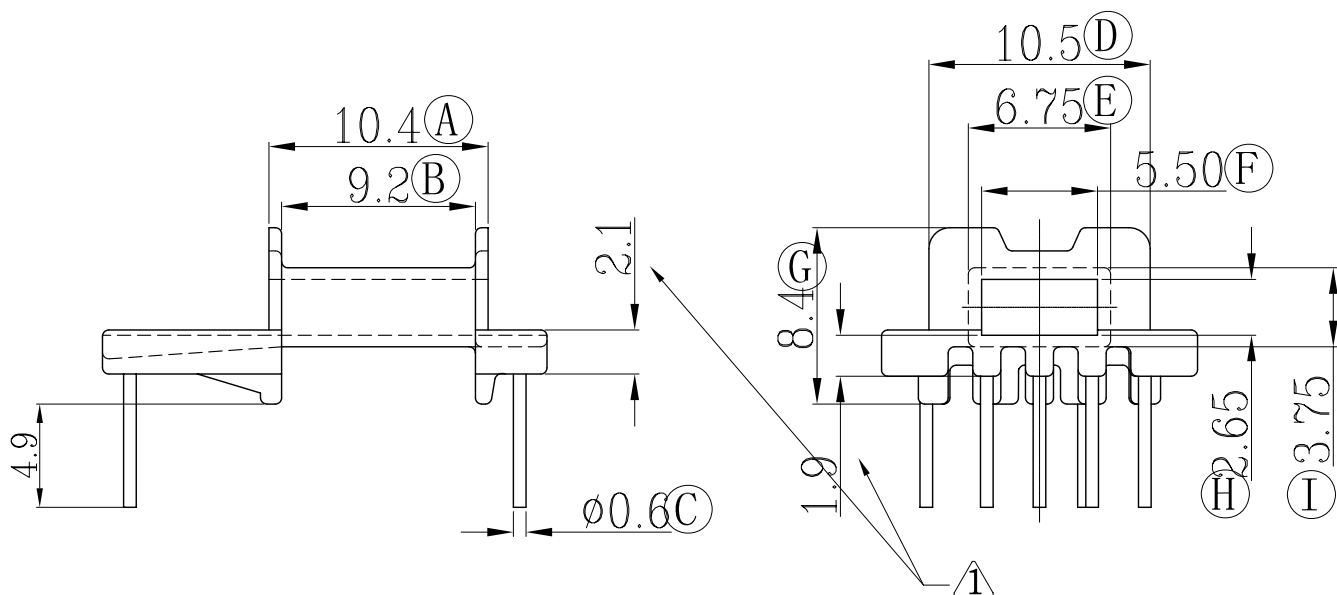

维柏源科技(深圳)有限公司

Valpo Technolony(ShenZhen) CO.,LTD

地址
Address深圳市宝安区沙井镇沙四东宝工业区B栋
Building B,Dongbao Industrial Area,Shasi Village,
Shajing Town,Baoan District,Shenzhen,Guangdong,China

电话(TEL)

0755-29697512 29697513

传真(FAX)

0755-29697510

型号
Model

EFD-15 (4+2P)

材质
Material

Phenolic

针脚材质
Terminal Material

CP Wire

设计
Designer

张湛

审核
Checked

邓高健

核准
Approved

谢眉山

公差(Tolerance)

 $0 < L \leq 4 \pm 0.1$
 $4 < L \leq 16 \pm 0.2$
 $16 < L \leq 63 \pm 0.3$
 $L > 63 \pm 0.4$

UL REC.

94V-0

单位(Unit)

MM

比例(Scale)

1/1

日期(Date)

07. 12. 14

针脚拉力(Pin Load)

1.0kg Min

投影方法
Projection methods