
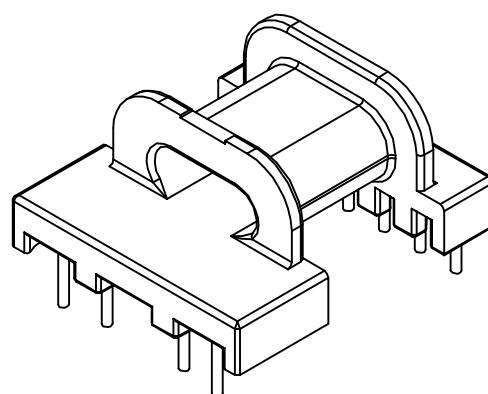
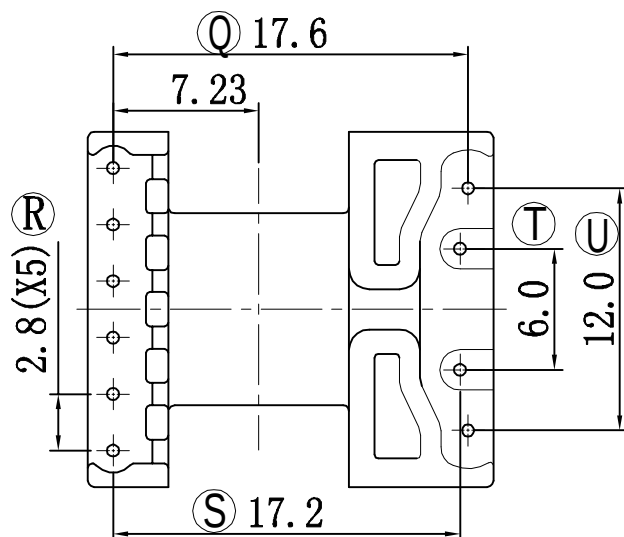
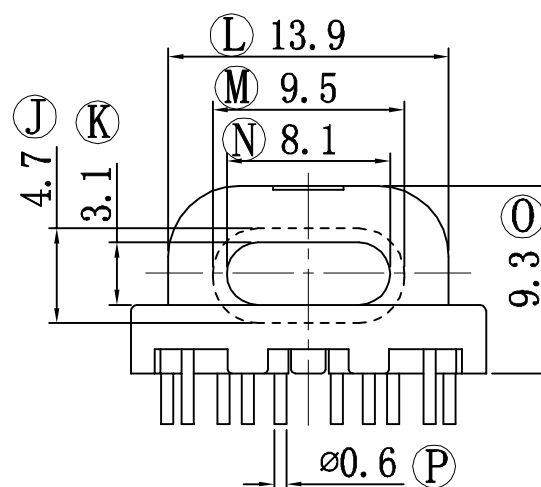
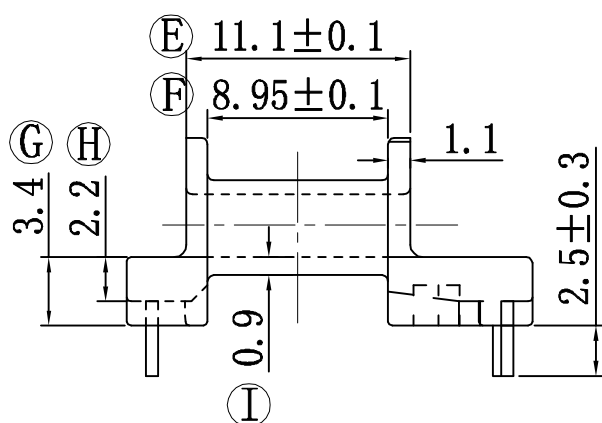
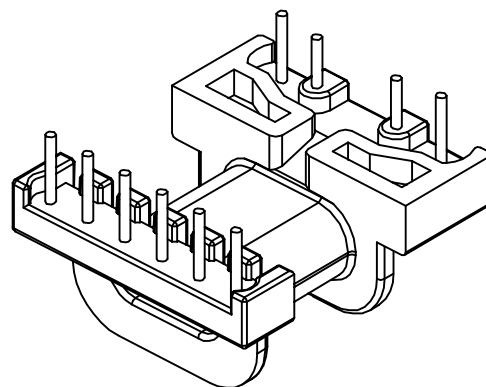


品名 VP-1702

REV	REVISIONS REC.	DATE
B	修改Pin座	10.08.05
C	修改E&F尺寸	10.08.19

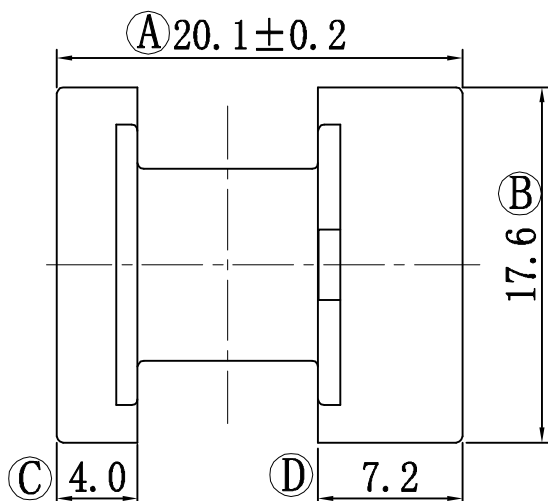

注:所有未标注尺寸公差 $\pm 0.10\text{mm}$
耐压4000VAC, 0.5mA, 60s

 维柏源科技(深圳)有限公司 Valpo Technology (ShenZhen) CO., LTD		型号 Model	EPC-17 (6+4P)	UL REC.	94V-0
		材质 Material	PHENOLIC (PM-9820)	单位(Unit)	MM
地址 Address	深圳市宝安区沙井镇沙四东宝工业区B栋 Building B, Dongbao Industrial Area, Shasi Village, Shajing Town, Baoan District, Shenzhen, Guangdong, China	针脚材质 Terminal Material	CP Wire	比例(Scale)	1/1
电话(TEL)	0755-29697512 29697513	设计 Designer	杨 锋	公差(Tolerance)	日期(Date) 2010.08.19
传真(FAX)	0755-29697510	审核 Checked	李章峰	$0\text{CL} \leq 4$ ± 0.1 $4\text{CL} \leq 16$ ± 0.2 $16\text{CL} \leq 63$ ± 0.3 > 63 ± 0.4	厚度: ± 0.15 Pin径: ± 0.05 排距: ± 0.20
		核准 Approved	Darren	针脚拉力(Pin Load)	1.2KG Min
				投影方法 Projection methods	 